

(12) UK Patent Application (19) GB (11) 2 354 763 (13) A

(43) Date of A Publication 04.04.2001

(21) Application No 0019157.7

(22) Date of Filing 07.08.2000

(30) Priority Data

(31) 99033886 (32) 17.08.1999 (33) KR

(71) Applicant(s)

Hyundai Electronics Industries Co., Ltd.
(Incorporated in the Republic of Korea)
San 136-1, Ami-ri, Bubal-eub, Ichon-shi,
Kyongki-do 467-860, Republic of Korea

(72) Inventor(s)

Keun-Kyu Kong
Jae-Chang Jung
Geun-Su Lee
Ki Ho Baik

(74) Agent and/or Address for Service

Maguire Boss
5 Crown Street, ST IVES, Cambridgeshire, PE27 5EB,
United Kingdom

(51) INT CL⁷

C07C 43/305, C08F 32/00

(52) UK CL (Edition S)

C2C CAA
C3P PDG
U1S S1421 S1553

(56) Documents Cited

US 4576742 A
Chemical Abstract No 133:51203 & JP2000159717A2
(HYUNDAI)


(58) Field of Search

UK CL (Edition R) C2C CWN
INT CL⁷ C07C 43/305
ONLINE: CAS-ONLINE, EPODOC, JAPIO, WPI

(54) Abstract Title

Novel photoresist monomers having stability to post exposure delay, polymers thereof and photoresist compositions containing the same

(57) Novel photoresist monomers, and photoresist polymers derived from monomers comprising the same. The photoresist monomers are represented by the following formula:

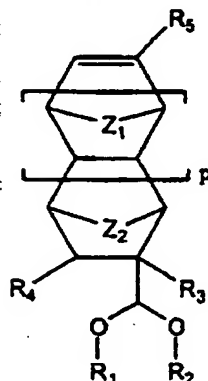

where Z₁, Z₂, R₁, R₂, R₃, R₄, R₅ and p are those defined herein. The photoresist compositions comprising the photoresist polymers of the present invention have excellent etching resistance and heat resistance, and remarkably enhanced PED stability (post exposure delay stability).

GB 2 354 763 A

BEST AVAILABLE COPY

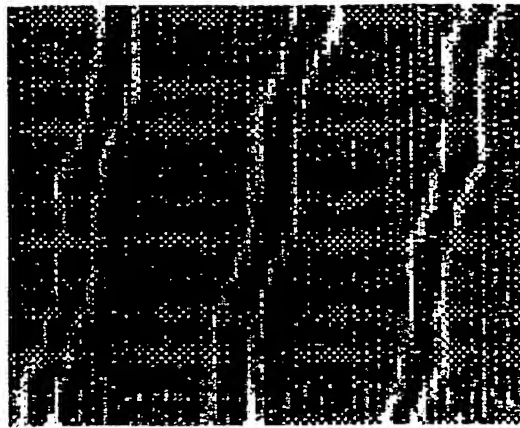


Fig.1

BEST AVAILABLE COPY

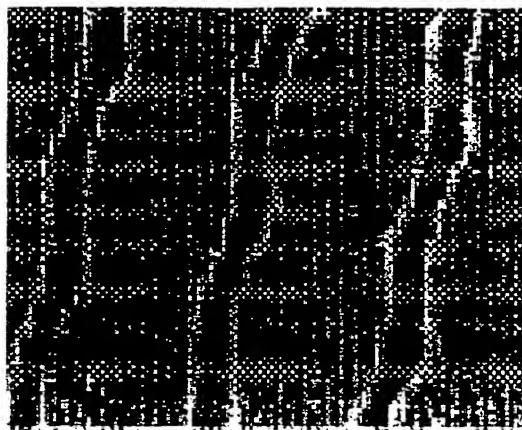


Fig.2

BEST AVAILABLE COPY

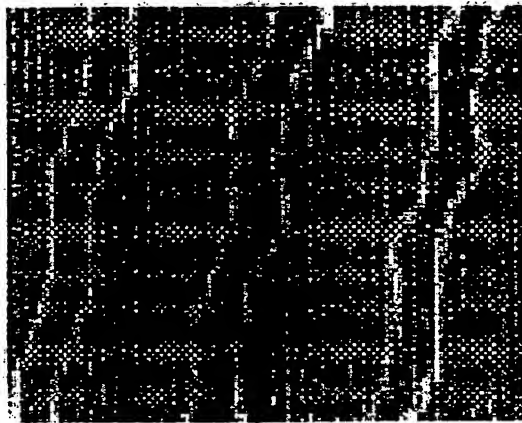


Fig.3

BEST AVAILABLE COPY

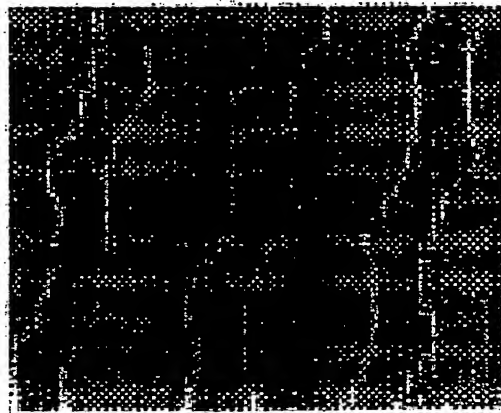


Fig.4

**NOVEL PHOTORESIST MONOMERS HAVING STABILITY TO POST
EXPOSURE DELAY, POLYMERS THEREOF AND PHOTORESIST
COMPOSITIONS CONTAINING THE SAME**

5 BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to photoresist monomers, polymers derived therefrom and photoresist compositions containing such polymers. In particular, the present invention is directed to photoresist polymers and photoresist compositions
10 containing such polymers which are not sensitive to the presence of environmental amine contaminants in a lithography process (e.g., using an ultraviolet light source) when fabricating a minute circuit for high integration semiconductor devices, and processes for preparing such photoresist polymers and photoresist compositions.

15 2. Description of the Background Art

Use of chemical amplification-type photoresists (i.e., photoresist compositions) is currently being investigated in photolithography processes to achieve a high sensitivity in minute image-formation on semiconductor devices. Such photoresists

are generally prepared by blending a photoacid generator with a matrix resin polymer (i.e., photoresist polymer) having an acid labile group.

In a photolithography process for producing semiconductor devices, the resolution of an image depends on the wavelength of the light used. Thus, the shorter the wavelength, higher the resolution, i.e., shorter wavelengths allow smaller pattern formation.

In order to be useful in a photolithography process, a photoresist (PR) must have an excellent etching and heat resistance, and adhesiveness. Moreover, to reduce the cost of manufacturing semiconductor devices, a PR should be capable of being developed in a common developing solution, such as a 2.38 wt% aqueous tetramethylammonium hydroxide (TMAH) solution. These qualities are particularly important in photolithography processes utilizing a short wavelength light source including KrF (248 nm), ArF (193 nm), VUV (157 nm) and EUV (13nm).

While it is difficult to synthesize a photoresist polymer that satisfies all of these requirements, a variety of photoresist polymers with improved etching resistance, adhesiveness and resolution have been developed. Unfortunately, however, most chemically-amplified photoresists currently available have a relatively short post exposure delay (PED) stability. In general, when there is delay between exposure of the

photoresist to light and development of the exposed photoresist, acids that are generated on the exposed area are neutralized by amine compounds which may be present in the production atmosphere. Since the pattern formation depends on acids that are generated by the exposure, neutralization of acids by atmospheric amine compounds reduce, prevent
5 or alter a pattern formation, e.g., a T-topping phenomenon may occur where the top portion of the pattern forms a T-shape.

SUMMARY OF THE INVENTION

It is therefore an object of the present invention to provide a photoresist
10 monomers having an enhanced PED stability.

Another object of the present invention is to provide PR polymers using the PR monomers described above and a process for preparing the same.

Another object of the present invention is to provide photoresist compositions using the PR polymers described above, and a process for preparing the
15 same.

Still another object of the present invention is to provide a semiconductor device produced by using the above described PR composition.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a photograph showing a pattern obtained by using photoresist compositions of the present invention without post exposure delay (PED);

5 Figure 2 is a photograph showing a pattern obtained by using photoresist compositions of the present invention and leaving the exposed photoresist compositions for 30 minutes before developing;

 Figure 3 is a photograph showing a pattern obtained by using photoresist compositions of the present invention and leaving the exposed photoresist compositions
10 for 60 minutes before developing; and


 Figure 4 is a photograph showing a pattern obtained by using photoresist compositions of the present invention and leaving the exposed photoresist compositions for 120 minutes before developing.

15 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention will be described with regard to the accompanying drawings which assist in illustrating various features of the invention. The drawings are

provided for the purpose of illustrating the practice of the present invention and do not constitute limitations on the scope thereof.

One aspect of the present invention provides a photoresist monomer of the formula:



1

where each of Z_1 and Z_2 is independently CH_2 , CH_2CH_2 , O or S;

each of R_1 and R_2 is independently substituted or unsubstituted (C_1-C_5)

straight or branched chain alkyl;

each of R_3 and R_4 is independently hydrogen, or substituted or unsubstituted


(C_1-C_5) straight or branched chain alkyl;

R_5 is hydrogen or methyl; and

p is an integer from 0 to 5.


Preferably, the PR monomer of the present invention is selected from the

group consisting of compounds of formulas 1a to 1d.

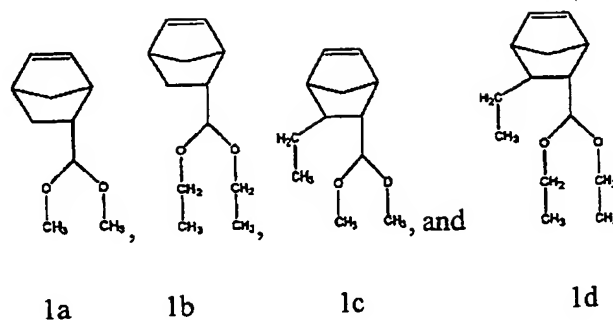


While compounds of formula 1 can be prepared by variety of methods, in one particular embodiment of the present invention, the compound of formula 1, where p is 0, is prepared by:

(a) reacting a compound of the formula:




2

with an aldehyde compound of the formula:



3

to produce a cyclic aldehyde compound of the formula:



4

(b) reacting the compound of formula 4 with an alcohol in the presence of a catalyst under conditions sufficient to produce the compound of formula 1, where R₁,

5 R₂, R₃, R₄ and R₅ are those defined above, and Z means Z₂.

The process can further include the steps of (c) neutralizing the acid present in the reaction mixture with a base (i.e., alkaline compound).


In one particular aspect of the step (a) of the above described preparation process, the compound of formula 2 is added to an organic solvent and the resulting solution is cooled to temperature in the range of -15 to -25 °C. The compound of formula 10 3 is then added dropwise to the reaction mixture, and the resulting mixture is stirred for 8 to 12 hours. The compound of formula 4 can be obtained by concentrating the reaction mixture and distilling the compound of formula 4 under reduced pressure.

In steps (b) and (c), the compound of formula 4 is reacted with an alcohol 15 (e.g., R₁OH, R₂OH, or mixtures thereof), preferably with refluxing, in the presence of an

acid catalyst. Any acids present in the reaction mixture is then neutralized with an alkaline compound (i.e., a basic compound). The compound of formula 1 which is produced in the reaction can be obtained from the reaction mixture by distillation under reduced pressure. Preferred acid catalysts of the step (b) includes

5 trifluoromethanesulfonic acid is.

The present invention also provides a photoresist polymer derived from a monomer comprising a compound of formula 1. The photoresist polymer can further comprise a second monomer of the formula:



10

5

where each of Y_1 and Y_2 is independently CH_2 , CH_2CH_2 , O or S;

R_6 is hydrogen or methyl;


R_8 is hydrogen, or substituted or unsubstituted (C_1 - C_5) straight or branched chain alkyl;

R_{10} is substituted or unsubstituted (C_1 - C_5) straight or branched chain alkylene; and

q is an integer from 0 to 5.

The polymer of the present invention can further comprise a third monomer
 5 having an acid labile protecting group. Exemplary acid labile protecting groups include *tert*-butyl, tetrahydrofuran-2-yl, tetrahydropyran-2-yl, 2-ethoxyethyl and *tert*-butoxyethyl.

In particular, the compound comprising an acid labile group is preferably a compound of the formula:

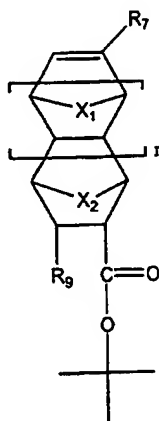

10

6

where each of X_1 and X_2 is independently CH_2 , CH_2CH_2 , O or S;

R_7 is hydrogen or methyl;


R_9 is hydrogen, or substituted or unsubstituted (C_1 - C_5) straight or branched

chain alkyl; and

r is an integer from 0 to 5.

In one particular embodiment, polymers of the present invention is of the

formula:

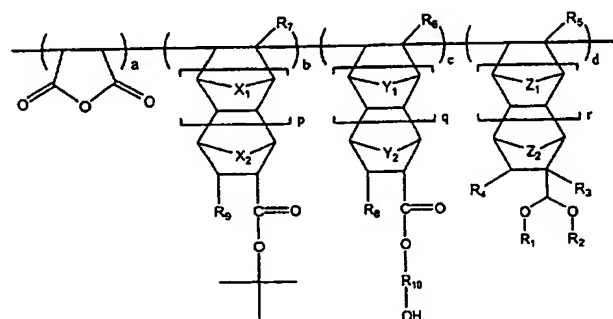

5

7

where

$X_1, X_2, Y_1, Y_2, Z_1, Z_2, R_1, R_2, R_3, R_4, R_5, R_6, R_7, R_8, R_9, R_{10}, p, q$ and r are

those defined above; and

10

a, b, c and d represent the relative amounts of each monomers, wherein the

mole ratio of $a : b : c : d = 0.50 : 0.125 \sim 0.40 : 0.025 \sim 0.10 : 0.05 \sim 0.35$.

Each monomeric units in the polymer of formula 7 represents a total relative ratio of each monomers. Thus, the formula 7 is not intended to indicate any particular order of each monomeric units. For example, the total amount "a" of the unit

derived from maleic anhydride may be inter dispersed throughout the polymer or it may be concentrated in one particular location of the polymer.


It is believed that one method for improving the PED stability of a photoresist composition is to change the shape of the polymer in the photoresist composition. The method changing the shape of the polymer in the photoresist composition is to use a shear thinning resist. A shear thinning resist can be prepared by (i) using a non-Newtonian shear thinning solvent as a component of the photoresist composition; (ii) changing the structure of the polymer; and/or (iii) controlling the temperature of the photoresist composition while it is being coated on the semiconductor substrate.

Thus, another embodiment of the present invention is directed to preparing the shear thinning resist by changing the structure of the polymer. The polymers of the present invention act as shear thinning agents unlike the conventional photoresist polymers. Without being bound by any theory, it is believed that the polymers of the present invention are a rigid rod or ellipsoidal shape and orient parallel to the shear direction providing a more tightly packed structure with little or no gaps between molecules in the coated layer. It is believed that this tightly packed structure prevents the acid, which is

generated in a photolithography process, from being neutralized by the environmental amine. As a result, photoresist polymers of the present invention provide a good photoresist pattern formation even if there is a post exposure delay.

Preferably, the molecular weight of polymers of the present invention is in the range of from about 4000 to about 12000.

Preferred polymers of the present invention include polymers of the formulas 7a and 7b.

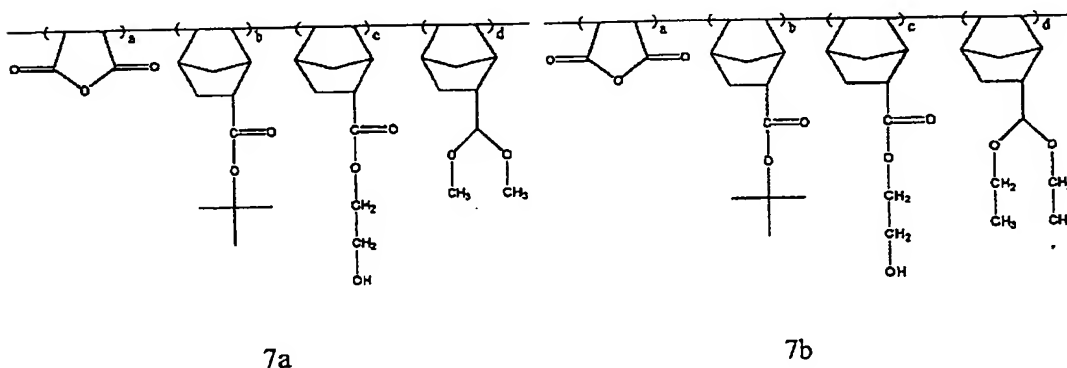

where a, b, c and d are those defined above.

Polymers of the present invention can be prepared by a radical polymerization of monomers with a conventional radical polymerization initiator. An exemplary procedure for preparing polymers of the present invention includes the steps of:

- (a) admixing, preferably in an organic solvent,

- (i) a compound of formula 1,
- (ii) a compound of formula 5,
- (iii) optionally a compound of formula 6,
- (iv) maleic anhydride, and
- (iv) polymerization initiator; and

5

(b) polymerizing said admixture under an inert atmosphere.

The organic solvent suitable for polymerization is selected from the group consisting of tetrahydrofuran, toluene, benzene, methylethylketone and dioxane.

Exemplary polymerization initiator include any conventional radical
10 polymerization initiators such as benzoylperoxide, 2,2'-azobisisobutyronitrile (AIBN),
acetylperoxide, laurylperoxide, *tert*-butylperacetate, *tert*-butylhydroperoxide and di-*tert*-
butylperoxide.

The present invention also provides a photoresist composition comprising a
photoresist polymer of the present invention, an organic solvent and a photoacid generator.

15 Preferred photoacid generators include sulfides and onium type compounds.

In one particular embodiment of the present invention, the photoacid generator is selected
from the group consisting of diphenyl iodide hexafluorophosphate, diphenyl iodide

hexafluoroarsenate, diphenyl iodide hexafluoroantimonate, diphenyl p-methoxyphenyl triflate, diphenyl p-toluenyl triflate, diphenyl p-isobutylphenyl triflate, diphenyl p-tert-butylphenyl triflate, triphenylsulfonium hexafluorophosphate, triphenylsulfonium hexafluoroarsenate, triphenylsulfonium hexafluoroantimonate, triphenylsulfonium triflate and dibutyl-naphthylsulfonium triflate. Typically, the amount of photoacid generator used is from about 0.1% by weight to about 10% by weight of the photoresist resin employed. It has been found that when the photoacid generator is used in the amount less than about 0.1%, it lowers photosensitivity of the PR composition, and when the photoacid generator is used in the amount greater than about 10%, it results in a poor pattern formation due to its high absorption of DUV (Deep Ultra Violet).

Exemplary organic solvents suitable in PR compositions of the present invention include methyl 3-methoxypropionate, ethyl 3-ethoxypropionate, propylene glycol methyl ether acetate, cyclohexanone, 2-heptanone and (2-methoxy)ethyl acetate. The amount of solvent used is preferably in the range of from about 200 % to about 800% by weight of the PR resin (i.e., copolymer). This ratio has been found to be particularly useful in obtaining a photoresist layer of a desirable thickness when coated on to a suitable substrate such as a silicon wafer in production of a semiconductor element.

The PR composition prepared by the present invention has an excellent etching resistance, adhesiveness and heat resistance. Also, its remarkably enhanced PED stability makes it very useful as ArF photosensitive film.

Another embodiment of the present invention provides a method for forming the PR pattern as follows: (a) coating the above described photoresist composition on a substrate of semiconductor element to form a photoresist film; (b) exposing the photoresist film to light using a light source; and (c) developing the photoresist film, for example, using an alkaline solution such as 2.38 wt% TMAH solution. Optionally, the photoresist film can be heated (i.e., baked), preferably to temperature in the range of from about 70 °C to about 200 °C, before and/or after the step (b).

Exemplary light sources which are useful for forming the PR pattern include ArF (193nm), KrF (248nm), VUV (157nm), EUV, E-beam, X-ray and ion beam. Preferably, the irradiation energy is in the range of from about 1 mJ/cm² to about 100 mJ/cm².

The present invention also provides a semiconductor device, which is manufactured using the photoresist composition described above.

Additional objects, advantages, and novel features of this invention will


become apparent to those skilled in the art upon examination of the following examples thereof, which are not intended to be limiting.

I. Preparation of Monomers

5 Example 1: Synthesis of a Monomer of Formula 1a

To a 1000 ml round flask was added 1 mole of cyclopentadiene of formula 2a and 100 g of THF. The solution was cooled to -20 °C, and 1.2 mole of acrolein of formula 3a was added dropwise. The reaction mixture was stirred for 10 hours, and concentrated using a vacuum evaporator. The resulting residue was distilled under
10 reduced pressure at 40 °C to provide a monomer of formula 4a (yield: 80%, 106 g).

To a 1000 ml round flask was added 106 g of the monomer of formula 4a, 400 g of methanol, and 0.1 ml of trifluoromethansulfonic acid. The mixture was refluxed for 10 hours. Thereafter, the reaction mixture was neutralized to about pH 7 by adding KOH, and distilled under reduced pressure at 50 °C to provide a monomer of formula 1a
15 (yield: 70%, 74 g).

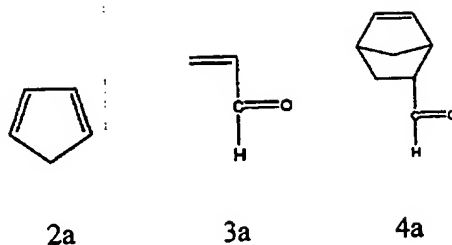


Example 2: Synthesis of a Monomer of Formula 1b

The procedure of Example 1 is repeated using ethanol instead of methanol
 5 to obtain a monomer of Formula 1b.

II. Preparation of Polymers

Example 3: Synthesis of a Polymer of Formula 7a

To a 250 cc flask was added 0.1 mole of maleic anhydride, 0.06 mole of the
 10 monomer of formula 6a, 0.01 mole of the monomer of formula 5a, 0.03 mole of the
 monomer of formula 1a (prepared in Example 1), 0.5 g of AIBN as a polymerization
 initiator and 20 g of tetrahydrofuran. The mixture was stirred at 65 °C for 10 hours under
 a nitrogen or an argon atmosphere. Ethyl ether was added to the reaction mixture and the
 polymer of formula 7a was obtained as a precipitate (yield: 30%, 8.5 g).

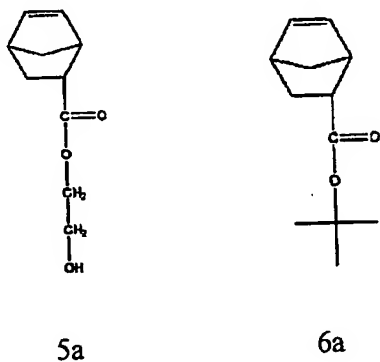

Example 4: Synthesis of Polymer of Chemical Formula 7b

- The procedure of Example 3 was repeated using the monomer of formula
- 5 1b prepared in Example 2 instead of the monomer of formula 1a to obtain a polymer of formula 7b.

III. Preparation of Photoresist Composition and Formation of Pattern

Example 5:

- 10 A photoresist composition was prepared by adding 20 g of the polymer of formula 7a (prepared in Example 3) and 0.24 g of triphenylsulfonium triflate to 160 g of propylene glycol methyl ether acetate.

The composition was coated on a silicon wafer. The coated wafer was soft-baked at 150 °C for 90 seconds, exposed to light using an ArF exposer, post-baked at

140 °C for 90 seconds, and developed in the 2.38 wt% TMAH developing solution to obtain a ultrafine pattern of 0.13 μm L/S.

Example 6:

- The procedure of Example 5 was repeated using the polymer of formula 7b prepared in Example 4 instead of the polymer of formula 7a.

Example 7: Experiment of PED Stability

- In the process of forming a pattern using photoresist compositions prepared in Examples 5 and 6, the exposed silicon wafer was placed in an atmosphere comprising over 30 ppb of amine for 0, 30, 60 and 120 minutes prior to developing the exposed silicon wafer to simulate post-exposure delay. Figures 1 to 4 show the results of pattern size variations, and Table 1 shows the variation of critical dimension (CD) resulting from the time delay.

Table 1. Variation of critical dimension (CD) resulting from PED.


Time (min)		0	30	60	120
Polymer					
Example 3 (Formula 7a)	CD(nm) 150nm	150	151	153	170
Example 4 (Formula 7b)	CD(nm) 150nm	151	152	153	169
Polymer without monomer of Formula 1	CD(nm) 150nm	170 (T-top occurred)	*T-top	*T-top	*T-top
*Pattern is not well formed due to T-top.					

As shown in Figures 1 to 4 and Table 1, the photoresist composition of the present invention is not sensitive to the presence of environmental amines relative to the conventional photoresist composition. Accordingly, a minute pattern can be formed in spite of post exposure delay.

As discussed above, photoresist compositions of the present invention have excellent PED stability, and as a result are suitable for use in a photolithography process using light sources of the ultrashort wavelength region, such as an ArF (193nm) light source.

What is claimed is:

1. A photoresist monomer of the formula:



5 wherein

each of Z_1 and Z_2 is independently CH_2 , CH_2CH_2 , O or S;

each of R_1 and R_2 is independently substituted or unsubstituted (C_1-C_5)

straight or branched chain alkyl;

each of R_3 and R_4 is independently hydrogen, or substituted or unsubstituted


10 (C_1-C_5) straight or branched chain alkyl;

R_5 is hydrogen or methyl; and

p is an integer from 0 to 5.

2. The photoresist monomer according to claim 1, which is selected


from the group consisting of compounds of the formulas:

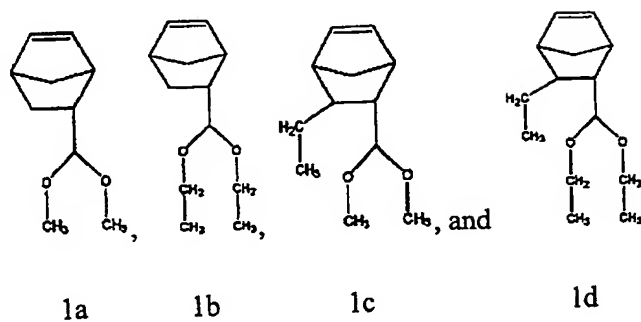


5 3. A process for preparing the photoresist monomer of claim 1,

wherein p is 0, said process comprising the steps of:

(a) reacting a compound of the formula:




with an aldehyde compound of the formula:



10

to produce a cyclic aldehyde compound of the formula:



wherein

Z is Z_2 which is CH_2 , CH_2CH_2 , O or S;

each of R_3 and R_4 is independently hydrogen, or substituted or unsubstituted (C_1 - C_3) straight or branched chain alkyl; and

5 R_5 is hydrogen or methyl;

(b) reacting said cyclic aldehyde compound with an alcohol of the formula:

R_1OH , R_2OH , or mixtures thereof

wherein


10 each of R_1 and R_2 is independently substituted or unsubstituted (C_1 - C_3) straight or branched chain alkyl;

in the presence of a catalyst to produce said photoresist monomer of claim 1 of the formula.

4. The process according to claim 3, wherein said catalyst of step (b) is
15 trifluoromethanesulfonic acid.

5. A photoresist polymer derived from a monomer comprising a

compound of the formula:



wherein

each of Z_1 and Z_2 is independently CH_2 , CH_2CH_2 , O or S;

5 each of R_1 and R_2 is independently substituted or unsubstituted (C_1-C_3)

straight or branched chain alkyl;


each of R_3 and R_4 is independently hydrogen, or substituted or unsubstituted

(C_1-C_3) straight or branched chain alkyl;

R_5 is hydrogen or methyl; and

10 p is an integer from 0 to 5.

6. The photoresist polymer according to claim 5, wherein said monomer further comprises a compound of the formula:



wherein

each of Y_1 and Y_2 is independently CH_2 , CH_2CH_2 , O or S ;

R_6 is hydrogen or methyl;

5 R_8 is hydrogen, or substituted or unsubstituted (C_1-C_5) straight or branched chain alkyl;

R_{10} is substituted or unsubstituted (C_1-C_5) straight or branched chain alkylene; and

q is an integer from 0 to 5.


10

7. The photoresist polymer according to claim 6, wherein said monomer further comprises a compound having an acid labile protecting group.

8. The photoresist polymer according to claim 7, wherein said acid

labile protecting group is selected from the group consisting of *tert*-butyl, tetrahydrofuran-2-yl, tetrahydropyran-2-yl, 2-ethoxyethyl and *tert*-butoxyethyl.

9. The photoresist polymer according to claim 7, wherein said
5 compound having the acid labile protecting group is a compound of the formula:



wherein


each of X_1 and X_2 is independently CH_2 , CH_2CH_2 , O or S;

R_7 is hydrogen or methyl;

- 10 R_9 is hydrogen, or substituted or unsubstituted (C_1-C_5) straight or branched
chain alkyl; and

r is an integer from 0 to 5.

10. The photoresist polymer according to claim 9 of the formula:

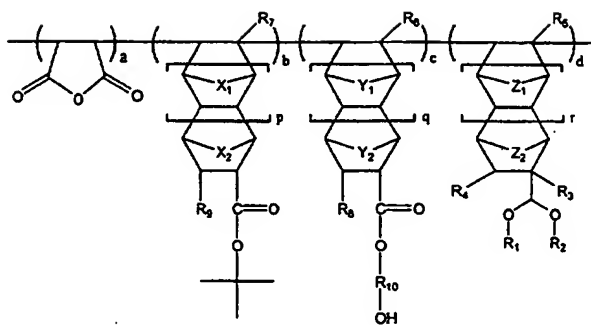


wherein

the mole ratio of a : b : c : d is 0.50 : 0.125~0.40 : 0.025~0.10 : 0.05~0.35.

5

11. The photoresist polymer according to claim 10 of the formula:

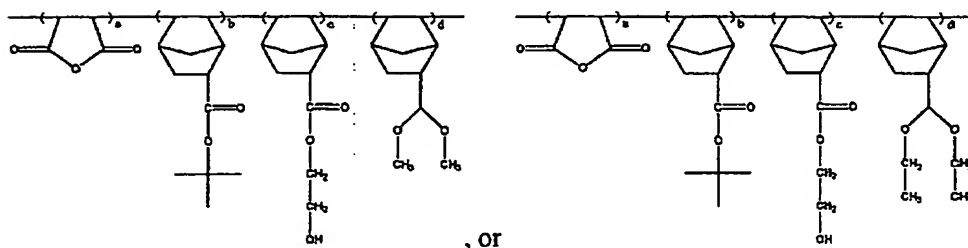

12. The photoresist polymer of claim 5, wherein the molecular weight

of said photoresist polymer is in the range of from about 4000 to about 12000.


10

13. A process for preparing said photoresist polymer of claim 10,


comprising the steps of:

(a) admixing in an organic solvent

(i) a compound of the formula:




(ii) a compound of the formula:



5

(iii) a compound of the formula:



(iv) maleic anhydride, and

(iv) a polymerization initiator; and

(b) polymerizing said admixture under an inert atmosphere:

10

14. The process according to claim 13, wherein said organic solvent is selected from the group consisting of tetrahydrofuran, toluene, benzene, methylethylketone and dioxane.

5 15. The process according to claim 13, wherein said polymerization initiator is selected from the group consisting of benzoylperoxide, 2,2'-azobisisobutyronitrile (AIBN), acetylperoxide, laurylperoxide, *tert*-butylperacetate, *tert*-butylhydroperoxide and di-*tert*-butylperoxide.

10 16. A photoresist composition comprising a photoresist polymer of claim 5, an organic solvent and a photoacid generator.

17. The photoresist composition according to claim 16, wherein said photoacid generator is sulfide or onium type compounds.

15 18. The photoresist composition according to claim 16, wherein said photoacid generator is selected from the group consisting of diphenyl iodide

hexafluorophosphate, diphenyl iodide hexafluoroarsenate, diphenyl iodide
hexafluoroantimonate, diphenyl p-methoxyphenyl triflate, diphenyl p-toluenyl triflate,
diphenyl p-isobutylphenyl triflate, diphenyl p-*tert*-butylphenyl triflate, triphenylsulfonium
hexafluorophosphate, triphenylsulfonium hexafluoroarsenate, triphenylsulfonium
5 hexafluoroantimonate, triphenylsulfonium triflate and dibutyl-naphthylsulfonium triflate.

19. The photoresist composition according to claim 16, wherein said
photoacid generator is used in an amount in the range of from 0.1 to 10% by weight of said
photoresist polymer employed.

10

20. The photoresist composition according to claim 16, wherein said
organic solvent is selected from the group consisting of methyl 3-methoxypropionate,
ethyl 3-ethoxypropionate, propylene glycol methyl ether acetate, cyclohexanone and 2-
heptanone.

15

21. The photoresist composition according to claim 16, wherein the
amount of the organic solvent is in the range of from 200 to 800% by weight of said

photoresist polymer.

22. A process for forming a photoresist pattern, comprising the steps of:

(a) coating a photoresist composition of claim 16 on a substrate of

5 semiconductor element to form a photoresist film;

(b) exposing said photoresist film to light using a light source; and

(c) developing said photoresist film.

23. The process according to claim 22, further comprising a baking step

10 before and/or after said exposure step (b).

24. The process according to claim 23, wherein said baking step is

performed at a temperature range of from about 70 to about 200°C.

15 25. The process according to claim 22, wherein said light source is ArF,

KrF, VUV, EUV, E-beam, X-ray or ion beam.

26. The process according to claim 22, wherein said photoresist film is irradiated with light-exposure energy in the range of from 1 to 100mJ/cm².

27. A semiconductor element manufactured by the process according to
5 claim 22.



Application No: GB 0019157.7
Claims searched: 1-27

Examiner: Dr William Thomson
Date of search: 23 January 2001

Patents Act 1977 Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK CI (Ed.S):

Int CI (Ed.7): C07C 43/305

Other: ONLINE: CAS-ONLINE, EPODOC, JAPIO, WPI

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
X	US 4576742 (SPRECKER ET AL) See whole document, in particular Example 3	1 and 2 at least
X, P	Chemical Abstract No 133:51203 & JP 2000159717 (HYUNDAI) 13/06/00 See abstract	1-27

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.